


NOTES:

- ① Minimum depth of ballast under sleeper 10".
- ② Minimum 3" compacted sandy loam, storedust, or 'A' grade fine crushed rock boxed into formation or carried out to shoulder of formation.
- ③ Existing bank to be benched to maximum 2' depth. Spoil material to be spread and compacted with new fill over whole width of formation.

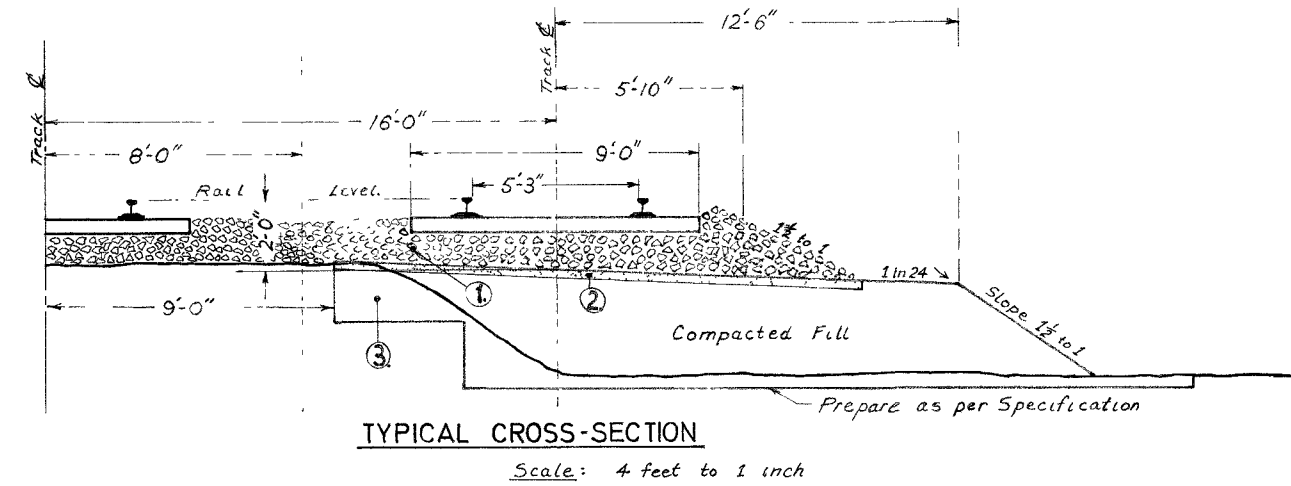

TYPICAL CROSS-SECTION

Scale: 4 feet to 1 inch

Field Book	Level Book	Revision	Date	Amendment	Amended by	Drawn	Traced	Checked	Corres. No.
		976							
		B	28-1-70	Cross section altered					
		A	19-11-69	Addition of Typical Cross-section					

Completed 6-8-70

V. R.
KIATA - SALISBURY
4000' CROSSING LOOP

Scale 100 feet to 1 inch.

23.10.69

Chief Civil Engineer

DRAWN BY PLAN NO. 332/69